




# Pressure Filter for Sandwich Stacking DFZ up to 80 l/min, up to 315 bar



## 1. TECHNICAL SPECIFICATIONS

### 1.1 FILTER HOUSING

#### Construction

The filter housings are designed in accordance with international regulations. They consist of a filter head and a screw-in filter bowl.

Standard equipment:

- Service access on the right
- Without clogging indicator connection

### 1.2 FILTER ELEMENTS

Hydrootvet filter elements are validated and their quality is constantly monitored according to the following standards:

- ISO 2941
- ISO 2942
- ISO 2943
- ISO 3724
- ISO 3968
- ISO 11170
- ISO 16889

Filter elements are available with the following pressure stability values:

Optimicron® (ON): 20 bar

Betamicon® (BH4HC): 210 bar

Metal fibre (V): 210 bar

### 1.3 FILTER SPECIFICATIONS

Nominal pressure	315 bar
Fatigue strength	At nominal pressure 10 <sup>6</sup> cycles from 0 to nominal pressure
Temperature range	-30 °C to +100 °C (-30 °C to -10 °C: p <sub>max</sub> = 157.5 bar)
Material of filter head	Steel
Material of filter bowl	Steel
Type of clogging indicator	VD (differential pressure measurement up to 420 bar operating pressure)
Pressure setting of the clogging indicator	8 bar (others on request)

### 1.4 SEALS

NBR (=Perbunan)

### 1.5 INSTALLATION

Pressure filter for sandwich stacking

### 1.6 SPECIAL MODELS AND ACCESSORIES

Port for clogging indicator

### 1.7 SPARE PARTS

See Original Spare Parts List


### 1.8 CERTIFICATES AND APPROVALS

on request


### 1.9 COMPATIBILITY WITH HYDRAULIC FLUIDS ISO 2943

- Hydraulic oils H to HLPD DIN 51524
- Lubrication oils DIN 51517, API, ACEA, DIN 51515, ISO 6743
- Compressor oils DIN 51506
- Biodegradable operating fluids VDMA 24568 HETG, HEES, HEPG
- Fire-resistant fluids HFA, HFB, HFC and HFD
- Operating fluids with high water content (>50% water content) on request

### Symbol for hydraulic systems DFZ 30

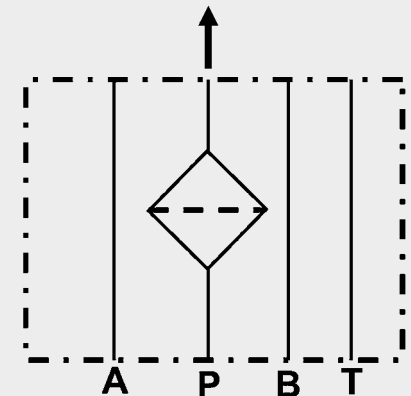

### DFZ 60/110

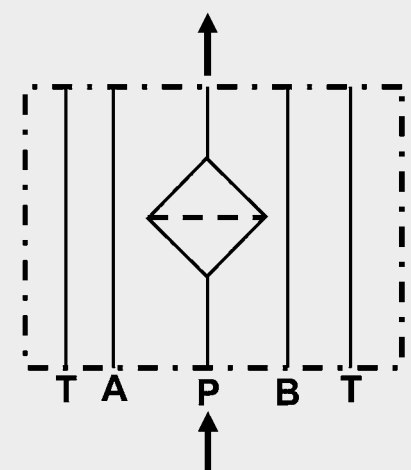

**2. MODEL CODE (also order example)****DFZ ON 60 Q C 10 D 1 . X /-L24****2.1 COMPLETE FILTER****Filter type**

DFZ

**Filter material**ON Optimicron  
BH/HC Betamicron® (BH4HC) V Metal fibre®**Size of filter or element**

DFZ: 30, 60, 110

**Operating pressure**

Q = 315 bar

**Type and size of connection**

Type	Port	Filter size		
		30	60	110
B	4 ports A 6 DIN 24340/ Cetop R 35 H	●		
C	5 ports A 10 DIN 24340/ Cetop R 35 H		●	●

**Filtration rating in µm**ON: 1, 3, 5, 10, 15, 20  
BH/HC, ON/PS, OH/PS, V: 3, 5, 10, 20**Type of clogging indicator**Y plastic blanking plug in indicator port  
A steel blanking plug in indicator port  
BM visual  
C electrical  
D visual and electrical  
] for other clogging indicators,  
see brochure no. 7.050../..**Type code**

1

**Modification number**

X the latest version is always supplied

**Supplementary details**L... light with appropriate voltage (24, 48, 110, 220 Volt)  
LED 2 light-emitting diodes up to 24 Volt  
V FPM seals  
W suitable for HFA and HFC emulsions  
1 service access on the left ("A" side)  
] only for clogging indicators type "D"**2.2 REPLACEMENT ELEMENT****0060 D 010 ON /-V****Size**

0030, 0060, 0110

**Type**

D

**Filtration rating in µm**ON: 001, 003, 005, 010, 015, 020  
BH/HC, ON/PS, OH/PS, V: 003, 005, 010, 020**Filter material**

ON, BH4HC, ON/PS, OH/PS, V

**Supplementary details**

V, W (for descriptions, see Point 2.1)

**2.3 REPLACEMENT CLOGGING INDICATOR****VD 8 D . X /-L24****Type**

VD differential pressure indicator up to 420 bar operating pressure

**Pressure setting**

8 standard 8 bar, others on request

**Type of clogging indicator**

D (see Point 2.1)

**Modification number**

X the latest version is always supplied

**Supplementary details**

L..., LED, V, W (for descriptions, see Point 2.1)

### 3. FILTER CALCULATION / SIZING

The total pressure drop of a filter at a certain flow rate Q is the sum of the housing  $\Delta p$  and the element  $\Delta p$  and is calculated as follows:

$$\Delta p_{total} = \Delta p_{housing} + \Delta p_{element}$$

$$\Delta p_{housing} = (\text{see Point 3.1})$$

$$\Delta p_{element} = Q \cdot \frac{SK^*}{1000} \cdot \text{viscosity}^{30}$$


(\*see Point 3.2)

For ease of calculation, our Filter Sizing Program is available on request free of charge.


#### 3.1 $\Delta p$ -Q HOUSING CURVES BASED ON ISO 3968

The housing curves apply to mineral oil with a density of 0.86 kg/dm<sup>3</sup> and a kinematic viscosity of 30 mm<sup>2</sup>/s. In this case, the differential pressure changes proportionally to the density.

DFZ 30

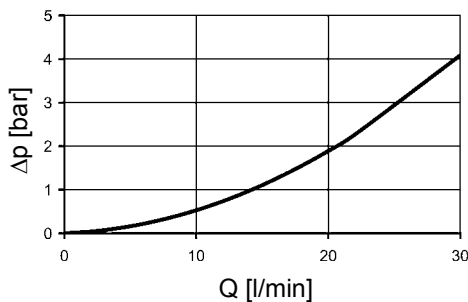

DFZ 60/110

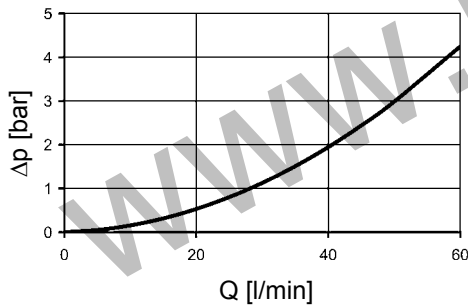

#### 3.2 GRADIENT COEFFICIENTS (SK) FOR FILTER ELEMENTS

The gradient coefficients in mbar/(l/min) apply to mineral oils with a kinematic viscosity of 30 mm<sup>2</sup>/s. The pressure drop changes proportionally to the change in viscosity.

DFZ	ON					
	1 μm	3 μm	5 μm	10 μm	15 μm	20 μm
30	77.8	63.9	43.3	22.8	14.0	11.3
60	53.5	26.0	18.3	12.1	9.78	6.32
110	25.8	13.4	9.61	6.06	4.63	2.99


DFZ	ON/PS				OH/PS			
	3 μm	5 μm	10 μm	20 μm	3 μm	5 μm	10 μm	20 μm
30	63.90	43.30	25.08	11.30	87.54	59.32	34.36	15.48
60	28.90	20.40	14.52	7.90	39.59	27.95	19.89	10.82
110	14.90	10.70	7.26	3.70	20.41	14.66	9.95	5.07

DFZ	V				BH4HC			
	3 μm	5 μm	10 μm	20 μm	3 μm	5 μm	10 μm	20 μm
30	18.4	13.5	7.5	3.6	91.2	50.7	36.3	19.0
60	16.0	9.3	5.4	3.3	58.6	32.6	18.1	12.2
110	8.2	5.6	3.3	2.2	25.4	14.9	8.9	5.6

## 4. DIMENSIONS


DFZ 30

shown with bowl access on "B" side (standard model)

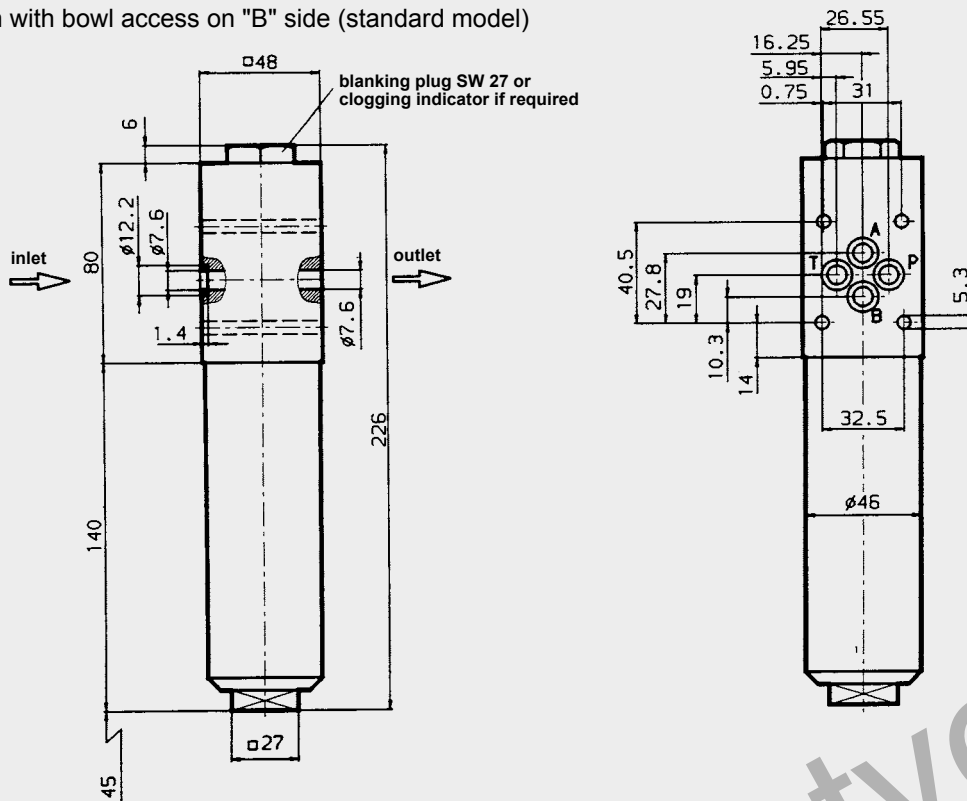

DFZ 60/110

shown with bowl access on "B" side (standard model)

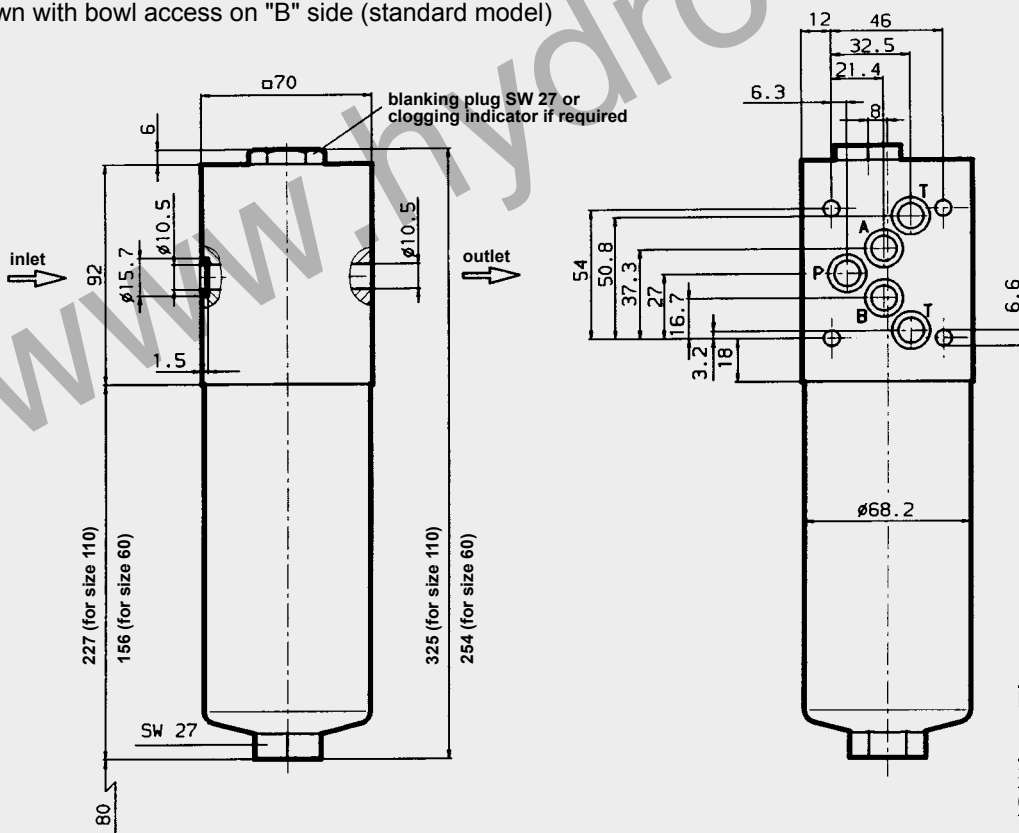

DFZ	Weight incl. element [kg]	Volume of pressure chamber [l]
30	2.4	0.13
60	5.9	0.20
110	6.8	0.33