



DJB-F200型电动加油泵

DJB-F200 electric fuel pump



ГИДРООТВЕТ
доступная гидравлика

● 结构特点及应用范围 Structural characteristics and scope of application



The pump is a quantitative volume pump with spur gear meshing, which is divided into three types: basic type, bucket type and cover type. The suction of the pump cover is protected by a net cover and works reliably.

It is suitable for filling grease into oil reservoir of manual or electric lubrication pump in dry oil centralized lubrication system, and can also be used in situations where grease needs to be pretreated and filtered.

● 技术参数: (符合JB/ZQ4543标准) Technical data: (Comply with JB/ZQ4543 standard)

Model	Nominal pressure (Mpa)	加油量 Refueling quantity (L/h)	Motor power (Kw)	Weight (kg)
DJB-F200	1	200	1.1	50
DJB-F200B				138
DJB-F200C				58

适用针入度295~385(25°C, 150g)1/10mm的润滑脂(NLGI0#~1#)和粘度等级大于N120的工业润滑油, 适用工作环境温度0°C~+80°C。
It is suitable for grease (NLGI0#~1#) with penetration of 295~385 (25°C, 150g) 1/10mm and industrial lubricating oil with viscosity grade greater than N120, and the working environment temperature is 0°C ~ + 80°C.

● 型号说明 Model description

DJB - F 200 B

基本型无代号 The basic type has no code.

B:带200L油桶 B: with 200L oil barrel

C:带桶盖 C: with bucket lid

加油量: L/h Refueling quantity: L/h

压力参数代号(1MPa)

Pressure parameter code(1MPa)


基本型号 Basic model

DJB-F200型电动加油泵


DJB-F200 electric fuel pump




● 外形尺寸 External dimension

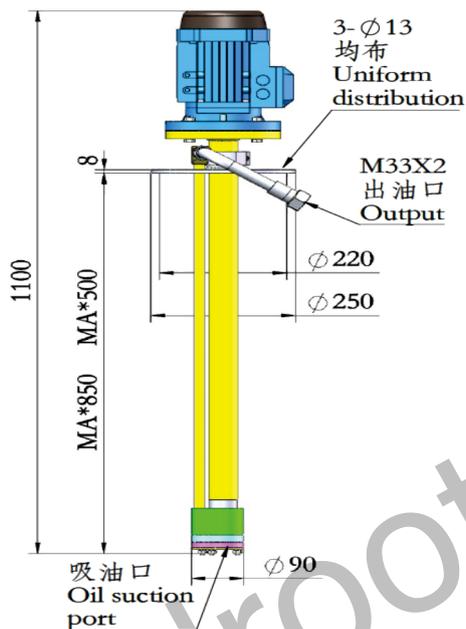

DJB-F200

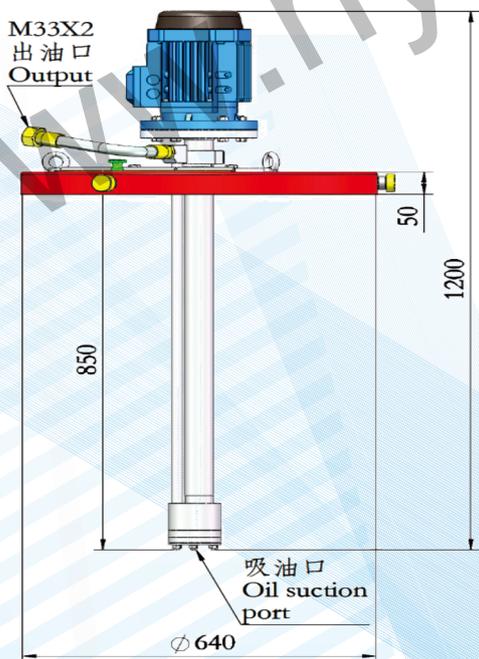

DJB-F200C

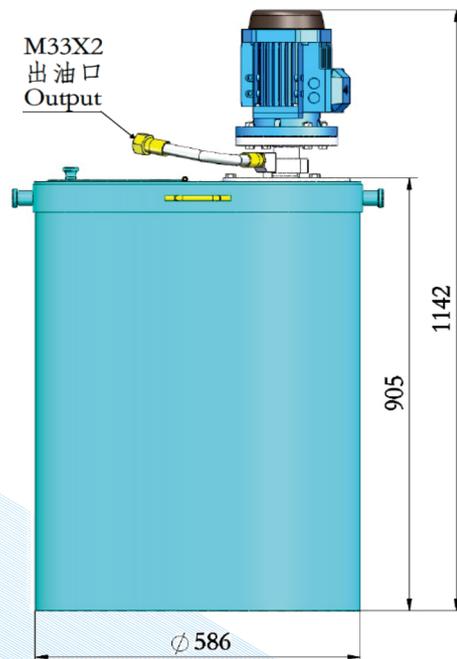

DJB-F200B

加油 (补脂) 泵